




Your Complete Array of Sanitization Solutions

Reduce airborne virus count and disinfect surfaces in seconds!

Upright Room Sanitizers

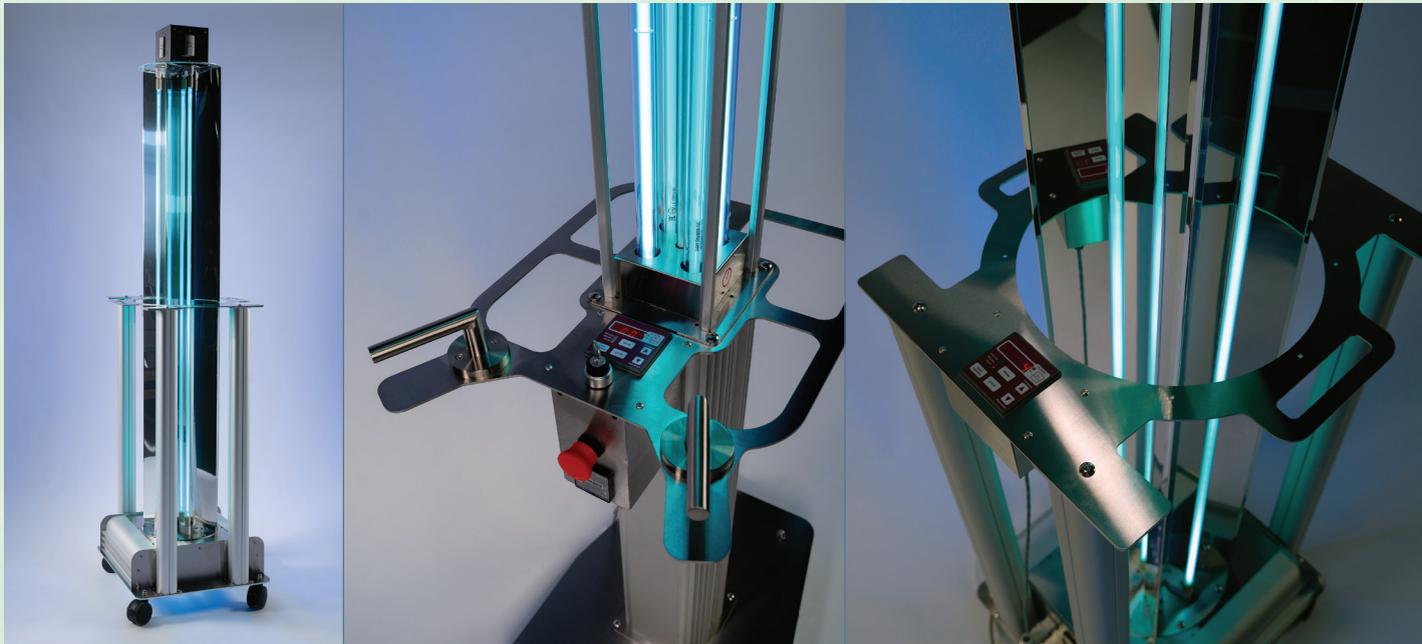

Space-500 & Space-1000: Mobile UVC Robots

These devices are equipped for the security of its users with multiple motion sensors that will shut-off the device in the presence of any motion. The devices all have preset off control that allows the user to set the timing and leave the room without any exposure.

Space-500 model can sanitize any room of 20 feet by 20 feet in minutes.

Space-1000 model has 65" long vertical lamps to even expose bottom sides of tables, chairs. The device is equipped with patent-pending floor UVC sanitizer that even covers the floor beneath the pedestal.

Intended Uses

- 220nm to 280nm nominal 254 nm UVC, 360° room sanitizer between patients and customers.
- Effective room air pathogen reduction device.
- Surface disinfection of equipment, walls, tables, furniture, fixtures, and high-contact items.
- Floor disinfection against viruses, bacteria, mold.
- Natural virus destruction without any resistance build-up.
- Rolls room to room on 4 casters.

Upright Room Sanitizers

Technical Specifications

Construction: Solid stainless steel
Operation: Timer with delay, so operator can safely leave the room
Frequency of use: As often as desired
Light source: Hard quartz, non-ozone type
Power input: 120 VAC 60 Hz, 230 VAC 50 Hz
Power inlet: EMC filtration (hospital grade) at the power inlet
Power cord: Standard, 15 Amp @120 VAC IEC grounded with fuses
Lamp Life: 16,000 hours
Safety devices: Entry fuses, on/off switch, delay timer

Space-500

Dimensions: 18" x 24" x 79.5" high
Light intensity: 155 microWatt/sqcm @ 8 feet distance
Influenza virus kill rate: 43 seconds @ 8 feet distance, 99.9% effective
Enclosure: Quartz secondary protection of lamps and lamp protection cage
Number of lamps: 4 lamps SHO
Amperage: 4.5 Amps @ 120 VAC, 2.5 Amps @ 230 VAC

Space-1000

Special features: Floor irradiation under equipment base via UVC lamp
Dimensions: 21" x 19" x 79.5" high
Light intensity: 185 microWatt/sqcm @ 8 feet distance
Reflector: Super polished UV reflectors
Number of lamps: 5 lamps, Including under unit floor UVC (patent pending)
Amperage: 6.1 Amps @ 120 VAC (model SHO), 3.5 Amps @ 230 VAC 50 Hz
Additional safety device: 360° motion sensor shut off

Caution

Do not look directly at the lamps without wearing eye protection. Always wear gloves, cover skin and direct away from people and animals. Do not expose skin to the light; it may cause severe burns in a few seconds.

Regulatory Approvals

EPA Registered, Conforms to CSA/NRTL/ANSI, UL1431 standards manufactured with ISO 13485-2016 quality controls.

Note: This is not a medical device.

